Sonesse® ULTRA 50 DC RS485

New Square Head

504A8 1134022









A new generation of intelligent motors that are controlled and monitored via Somfy digital network solutions and animeo®IP total solar management system.

Technical Features


Voltage Supply 24V DC Index Protection Rating IP 20 (interior) **Limit Switch Type** Flectronic **Limit Switch Capacity** 38 Turns

Temperature 32°F to 140°F (0°C to 60°C) **Working Range** (Interior use only)

Insulation Class Class 111

Wiring In accordance with NFC and local electrical codes.

Dimensions

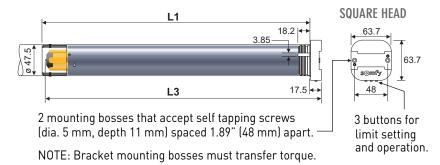

L1	30.7 in (780 mm)
L3	31.5 in (800 mm)
Data & Power Cable Length	10 in. (250 mm)

< 47 dBA

4 Nm

0.4 Nm

24 V DC

5 minutes

≤38 dBA

10-25 Adjustable

1.5A

Specifications

- * Minimum Torque: Minimum application weight to ensure smooth operation.
- ** Sound Level: According to standards ISO 3741 NF 31022 in dBA

ref 1pW at nominal torque without end product.

Fabrication Recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Due to the variances of standard aluminum extrusion tolerances. it is recommended to screw the drive wheel & pin end to immobilize them and ensure quiet performance throughout the life of the product. Interior Tube Diameter (ID) \rightarrow 47.5 mm must be respected.

Torque

Speed

* Minimum Torque

Thermal Protection

≤ 38 dBA


Nominal Voltage


Rated Current

** Sound Level

- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.
- 500 Series Drive Stop and Screw (9910004) is recommended to prevent noise and drive wheel separation from motor shaft.
- Somfy Soft Clip Drive Wheel Adaptors (brown in color) are not recommended.

Pigtail: Data and Power

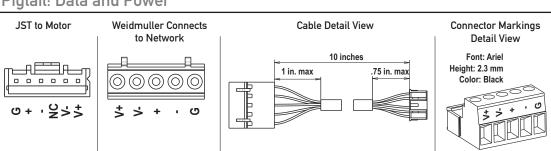



Maximum Power Cable Length (to guarantee characteristics)

GAUGE	LENGTH
14 AWG	240 Ft.
16 AWG	150 Ft.
18 AWG	100 Ft.

D-0051



